

SUPPLY SCOPE: Nudura 8in Standard external walls and 6in Standard party / stair / lift walls on 2 courses of footing forms, delivered as FULL forms and cut on site to these drawings; accessories; BuildEase modelling and pre-cut support. Concrete, reinforcement, RC slabs, balconies, stairs, block partitions, windows and doors are by others (shown for coordination). Structural design (Turkish Building Earthquake Code), TS 825 and the fire regulation by the client's engineers.

QUOTATION - NOT FOR CONSTRUCTION

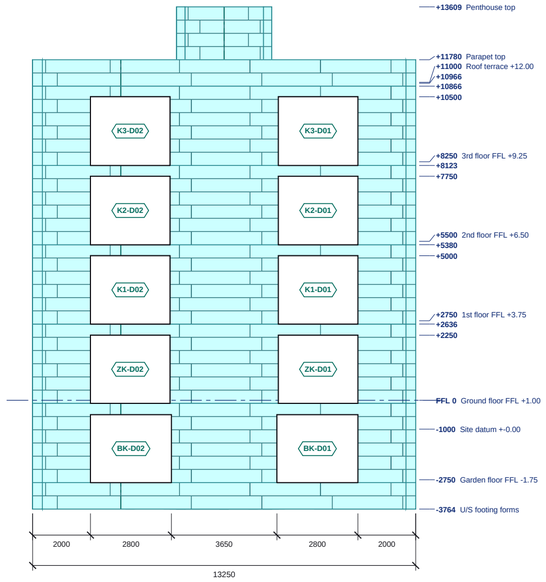

ELEVATION - GRID A SIDE

Scale 1:150 @ A2 | Levels above GF FFL; sills and heads in the schedule

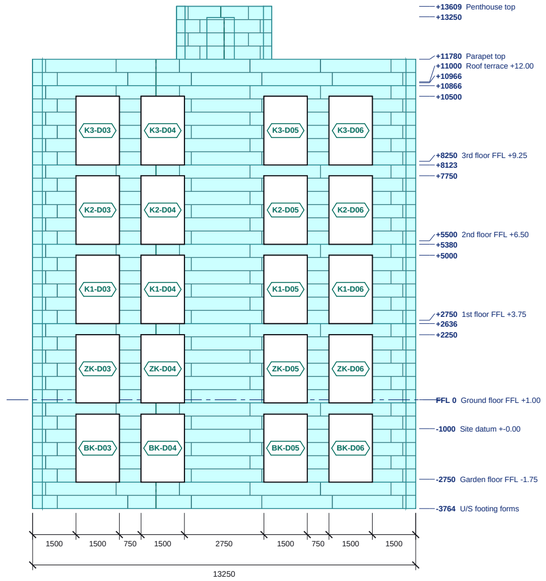

ELEVATION - GRID H SIDE

Scale 1:150 @ A2 | Levels above GF FFL; sills and heads in the schedule



ICF external EPS face
Block course joint
Stack joint

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

ELEVATION - GRID A SIDE: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
BK-D01	2800	2350	-2850	+-500	-
BK-D02	2800	2350	-2850	+-500	-
K1-D01	2750	2364	+2636	+5000	-
K1-D02	2750	2364	+2636	+5000	-
K2-D01	2750	2370	+5380	+7750	-
K2-D02	2750	2370	+5380	+7750	-
K3-D01	2750	2377	+8123	+10500	-
K3-D02	2750	2377	+8123	+10500	-
ZK-D01	2750	2357	-107	+2250	-
ZK-D02	2750	2357	-107	+2250	-

Structural openings in the ICF; sill and head above GF FFL.

ELEVATION - GRID H SIDE: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
BK-D03	1500	2350	-2850	+-500	-
BK-D04	1500	2350	-2850	+-500	-
BK-D05	1500	2350	-2850	+-500	-
BK-D06	1500	2350	-2850	+-500	-
K1-D03	1500	2364	+2636	+5000	-
K1-D04	1500	2364	+2636	+5000	-
K1-D05	1500	2364	+2636	+5000	-
K1-D06	1500	2364	+2636	+5000	-
K2-D03	1500	2370	+5380	+7750	-
K2-D04	1500	2370	+5380	+7750	-
K2-D05	1500	2370	+5380	+7750	-
K2-D06	1500	2370	+5380	+7750	-
K3-D03	1500	2377	+8123	+10500	-
K3-D04	1500	2377	+8123	+10500	-
K3-D05	1500	2377	+8123	+10500	-
K3-D06	1500	2377	+8123	+10500	-
ZK-D03	1500	2357	-107	+2250	-
ZK-D04	1500	2357	-107	+2250	-
ZK-D05	1500	2357	-107	+2250	-
ZK-D06	1500	2357	-107	+2250	-

Structural openings in the ICF; sill and head above GF FFL.

ELEVATION - GRID A SIDE: LEVELS

Level	FFL
U/S footing forms	-3764
Garden floor FFL -1.75	-2750
Site datum +-0.00	-1000
Ground floor FFL +1.00	0
top of ICF	+2250
top of ICF	+2636
1st floor FFL +3.75	+2750
top of ICF	+5000
top of ICF	+5380
2nd floor FFL +6.50	+5500
top of ICF	+7750
top of ICF	+8123
3rd floor FFL +9.25	+8250
top of ICF	+10500
top of ICF	+10866
top of roof build-up	+10966
Roof terrace +12.00	+11000
Parapet top	+11780
Penthouse top	+13609

ELEVATION - GRID H SIDE: LEVELS

Level	FFL
U/S footing forms	-3764
Garden floor FFL -1.75	-2750
Site datum +-0.00	-1000
Ground floor FFL +1.00	0
top of ICF	+2250
top of ICF	+2636
1st floor FFL +3.75	+2750
top of ICF	+5000
top of ICF	+5380
2nd floor FFL +6.50	+5500
top of ICF	+7750
top of ICF	+8123
3rd floor FFL +9.25	+8250
top of ICF	+10500
top of ICF	+10866
top of roof build-up	+10966
Roof terrace +12.00	+11000
Parapet top	+11780
top of ICF	+13250
Penthouse top	+13609

NOTES

1. ICF: Nudura 8" Std, 66.7 EPS + 203.2 core + 66.7 EPS = 336.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Masonry shown as modelled.
4. See ES26-085-GA-01 for plan setting out, lintels and steel.
5. Datum: +-0.00 = site datum (drawings); garden floor FFL -1.75, ground floor FFL +1.00, storeys 2.75 m.
6. ICF on the drawn outer face of the external walls (8in Std 337 v 250 drawn) - rooms lose 87 mm at the envelope.

REVISIONS

REV	DATE	DESCRIPTION
Q01	22.10.26	First issue - one block Rev C / 12 blocks Rev B

Nudura™ BuildEase

CLIENT	PROJECT
Arfa Yapi Sistemleri via Tremco CPG Turkey	Arfa Yapi apartment blocks, Bayrakli, Izmir - Block A1

DRAWING TITLE
NORTH AND SOUTH ELEVATIONS
ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A2	22.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-085-EL-01	Q01