

SUPPLY SCOPE: Nudura 8in Standard external walls and 6in Standard party / stair / lift walls on 2 courses of footing forms, delivered as FULL forms and cut on site to these drawings; accessories; BuildEase modelling and pre-cut support. Concrete, reinforcement, RC slabs, balconies, stairs, block partitions, windows and doors are by others (shown for coordination). Structural design (Turkish Building Earthquake Code), TS 825 and the fire regulation by the client's engineers.

QUOTATION - NOT FOR CONSTRUCTION

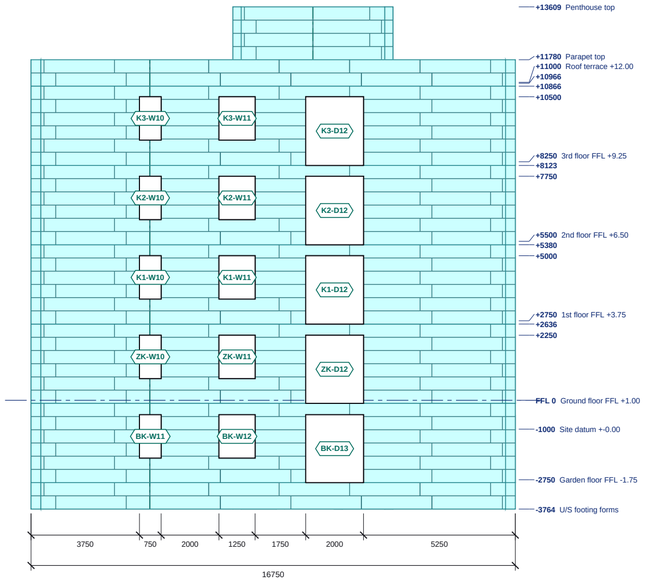

ELEVATION - GRID 11 SIDE

Scale 1:150 @ A2 | Levels above GF FFL; sills and heads in the schedule

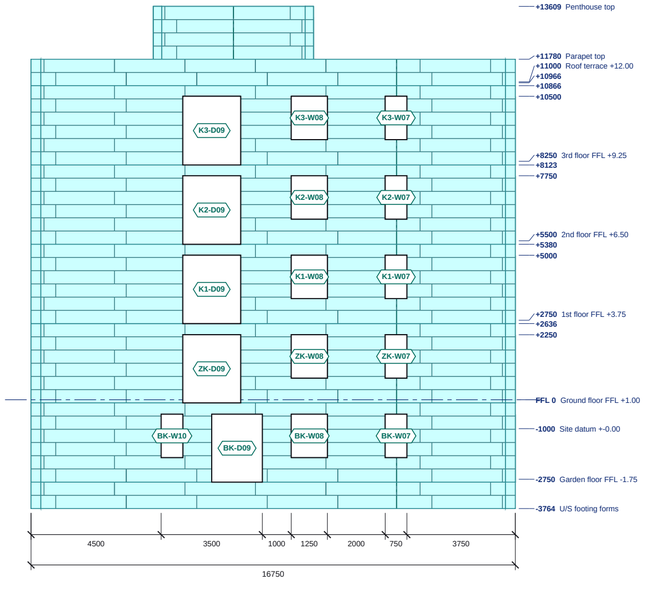

ELEVATION - GRID 1 SIDE (ENTRANCE)

Scale 1:150 @ A2 | Levels above GF FFL; sills and heads in the schedule

0 1 2 3 4 5 6 7 8m

ICF external EPS face
Block course joint
Stack joint

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

ELEVATION SCHEDULES

ELEVATION - GRID 11 SIDE: OPENINGS

Ref	Width	Height	Sill	Head	Lintel
BK-D13	2000	2350	-2850	+-500	-
BK-W11	750	1500	-2000	+-500	-
BK-W12	1250	1500	-2000	+-500	-
K1-W10	750	1500	+3500	+5000	-
K1-W11	1250	1500	+3500	+5000	-
K1-D12	2000	2364	+2636	+5000	-
K2-W10	750	1500	+6250	+7750	-
K2-W11	1250	1500	+6250	+7750	-
K2-D12	2000	2370	+5380	+7750	-
K3-W10	750	1500	+9000	+10500	-
K3-W11	1250	1500	+9000	+10500	-
K3-D12	2000	2377	+8123	+10500	-
ZK-D12	2000	2357	-107	+2250	-
ZK-W10	750	1500	+750	+2250	-
ZK-W11	1250	1500	+750	+2250	-

Structural openings in the ICF; sill and head above GF FFL.

ELEVATION - GRID 1 SIDE (ENTRANCE): OPENINGS

Ref	Width	Height	Sill	Head	Lintel
BK-D09	1750	2350	-2850	+-500	-
BK-W07	750	1500	-2000	+-500	-
BK-W08	1250	1500	-2000	+-500	-
BK-W10	750	1500	-2000	+-500	-
K1-W07	750	1500	+3500	+5000	-
K1-W08	1250	1500	+3500	+5000	-
K1-D09	2000	2364	+2636	+5000	-
K2-W07	750	1500	+6250	+7750	-
K2-W08	1250	1500	+6250	+7750	-
K2-D09	2000	2370	+5380	+7750	-
K3-W07	750	1500	+9000	+10500	-
K3-W08	1250	1500	+9000	+10500	-
K3-D09	2000	2377	+8123	+10500	-
ZK-D09	2000	2357	-107	+2250	-
ZK-W07	750	1500	+750	+2250	-
ZK-W08	1250	1500	+750	+2250	-

Structural openings in the ICF; sill and head above GF FFL.

ELEVATION - GRID 11 SIDE: LEVELS

Level	FFL
U/S footing forms	-3764
Garden floor FFL -1.75	-2750
Site datum +-0.00	-1000
Ground floor FFL +1.00	0
top of ICF	+2250
top of ICF	+2636
1st floor FFL +3.75	+2750
top of ICF	+5000
top of ICF	+5380
2nd floor FFL +6.50	+5500
top of ICF	+7750
top of ICF	+8123
3rd floor FFL +9.25	+8250
top of ICF	+10500
top of ICF	+10866
top of roof build-up	+10966
Roof terrace +12.00	+11000
Parapet top	+11780
Penthouse top	+13609

ELEVATION - GRID 1 SIDE (ENTRANCE): LEVELS

Level	FFL
U/S footing forms	-3764
Garden floor FFL -1.75	-2750
Site datum +-0.00	-1000
Ground floor FFL +1.00	0
top of ICF	+2250
top of ICF	+2636
1st floor FFL +3.75	+2750
top of ICF	+5000
top of ICF	+5380
2nd floor FFL +6.50	+5500
top of ICF	+7750
top of ICF	+8123
3rd floor FFL +9.25	+8250
top of ICF	+10500
top of ICF	+10866
top of roof build-up	+10966
Roof terrace +12.00	+11000
Parapet top	+11780
Penthouse top	+13609

NOTES

1. ICF: Nudura 8" Std, 66.7 EPS + 203.2 core + 66.7 EPS = 336.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. External EPS face shown with the block course joints, vertical block joints and stack joints as populated.
2. Levels above GF FFL. Openings are structural openings in the ICF; glazing, doors, render and finishes by others, not shown.
3. Masonry shown as modelled.
4. See ES26-085-GA-01 for plan setting out, lintels and steel.
5. Datum: +-0.00 = site datum (drawings); garden floor FFL -1.75, ground floor FFL +1.00, storeys 2.75 m.
6. ICF on the drawn outer face of the external walls (8in Std 337 v 250 drawn) - rooms lose 87 mm at the envelope.

REVISIONS

REV	DATE	DESCRIPTION
Q01	22.10.26	First issue - one block Rev C / 12 blocks Rev B

Nudura™ BuildEase

CLIENT	PROJECT
Arfa Yapi Sistemleri via Tremco CPG Turkey	Arfa Yapi apartment blocks, Bayrakli, Izmir - Block A1

DRAWING TITLE

EAST AND WEST ELEVATIONS

ICF elevations with openings, levels and roof build-up

SCALE	SIZE	DATE
1:150	A2	22.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-085-EL-02	Q01