
SUPPLY SCOPE: Nudura 8in Standard external walls and 6in Standard party / stair / lift walls on 2 courses of footing forms, delivered as FULL forms and cut on site to these drawings; accessories; BuildEase modelling and pre-cut support. Concrete, reinforcement, RC slabs, balconies, stairs, block partitions, windows and doors are by others (shown for coordination). Structural design (Turkish Building Earthquake Code), TS 825 and the fire regulation by the client's engineers.

QUOTATION - NOT FOR CONSTRUCTION



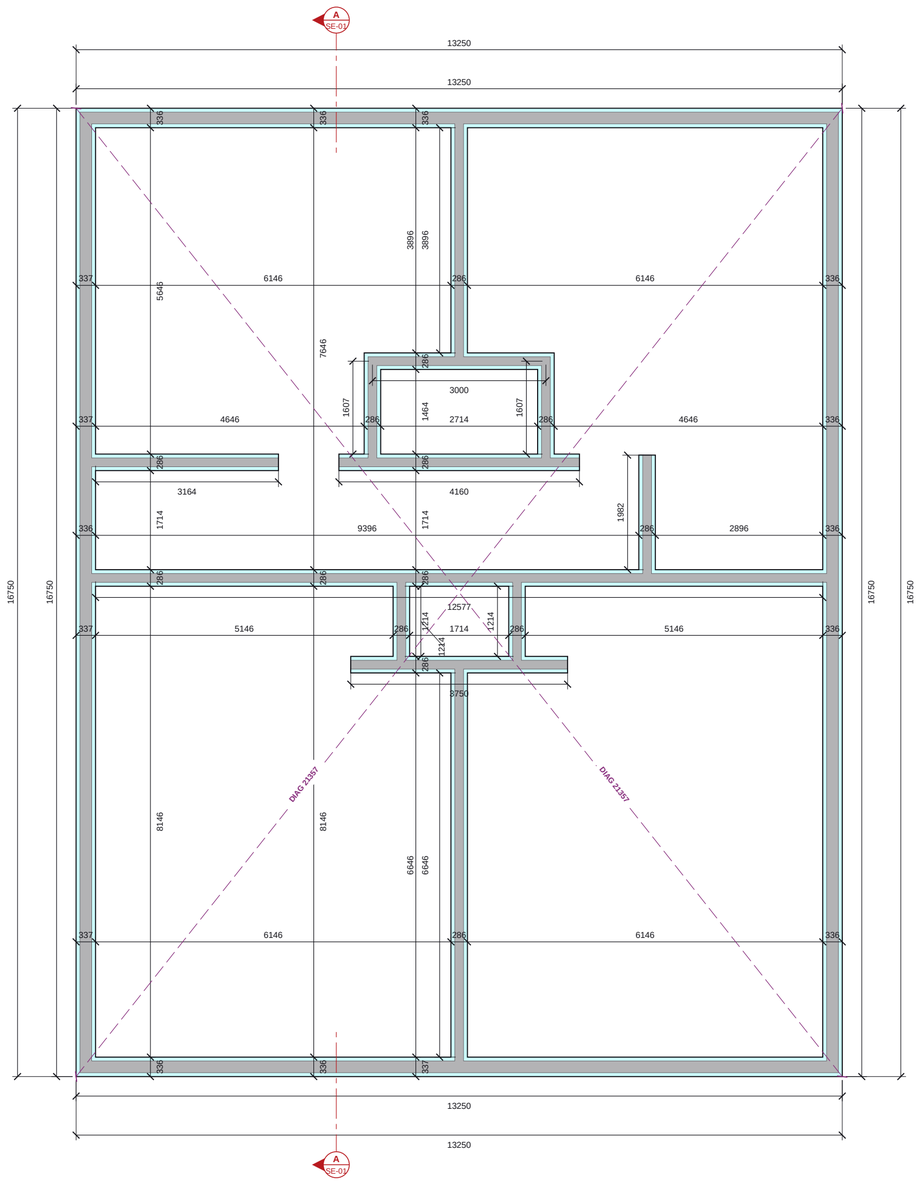

EPS insulation (Nudura form)
Concrete core
End cap at opening
Load-bearing masonry wall (context)
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

FOOTING BLOCKS (2 COURSES) ICF PLAN

Scale 1:75 @ A2 | Plan cut at -3307

0 1 2 3 4m

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.

FOOTING BLOCKS (2 COURSES) ICF SCHEDULES

OPENING SCHEDULE

Ref	Width	Height	Sill	Head	Lintel
none					

Structural openings in the ICF; sill and head above GF FFL.

NOTES

1. ICF: Nudura 8" Std, 66.7 EPS + 203.2 core + 66.7 EPS = 336.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design issued (no building permit yet). ICF per the Arfa Yapi architectural set (sheets 02-14/14): every drawn 250 load-bearing wall in ICF - 8in Std (203 core = the 20 cm core asked for) external, 6in Std party / stair / lift walls; 20 cm in-situ RC slabs bearing into the cores. Reinforcement and the earthquake design by the client's engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Datum: +-0.00 = site datum (drawings); garden floor FFL -1.75, ground floor FFL +1.00, storeys 2.75 m.
7. ICF on the drawn outer face of the external walls (8in Std 337 v 250 drawn) - rooms lose 87 mm at the envelope.

REVISIONS

REV	DATE	DESCRIPTION
Q01	22.10.26	First issue - one block Rev C / 12 blocks Rev B

Nudura™ BuildEase

CLIENT	PROJECT
Arfa Yapi Sistemleri via Tremco CPG Turkey	Arfa Yapi apartment blocks, Bayrakli, Izmir - Block A1

DRAWING TITLE
FOOTING BLOCKS (2 COURSES) ICF GENERAL ARRANGEMENT

SCALE	SIZE	DATE
1:75	A2	22.10.26
DRAWN	CHECKED	APPROVED
TS		

STATUS	DRAWING No.	REV
QUOTATION	ES26-085-GA-01	Q01