
**SUPPLY SCOPE: Nudura 8in Standard external walls and 6in Standard party / stair / lift walls on 2 courses of footing forms, delivered as FULL forms and cut on site to these drawings; accessories; BuildEase modelling and pre-cut support. Concrete, reinforcement, RC slabs, balconies, stairs, block partitions, windows and doors are by others (shown for coordination). Structural design (Turkish Building Earthquake Code), TS 825 and the fire regulation by the client's engineers.**

**QUOTATION - NOT FOR CONSTRUCTION**

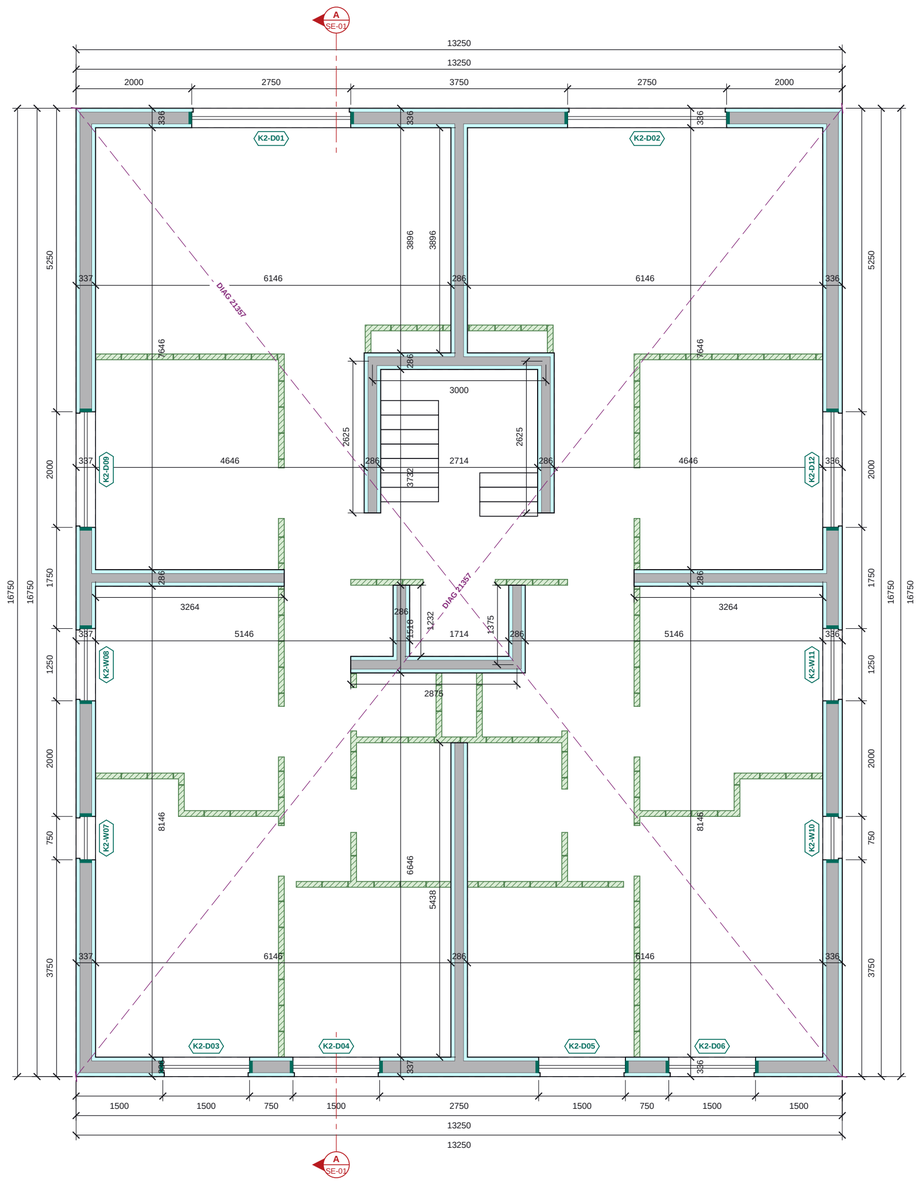


EPS insulation (Nudura form)
Concrete core
End cap at opening
Load-bearing masonry wall (context)
ICF walls of the level below (dashed)
Engineer's pier bars (n-H12 vertical bars in ICF pier) / WS wall starters
Setting-out check diagonal (external ICF corners)
Section line (see SE sheet)

## 2ND FLOOR ICF PLAN

Scale 1:75 @ A2 | Plan cut at +6752

0 1 2 3 4m

## 2ND FLOOR ICF SCHEDULES

### OPENING SCHEDULE

| Ref | Width | Height | Sill | Head | Lintel |
|---|---|---|---|---|---|
| K2-D01 | 2750 | 2370 | +5380 | +7750 | - |
| K2-D02 | 2750 | 2370 | +5380 | +7750 | - |
| K2-D03 | 1500 | 2370 | +5380 | +7750 | - |
| K2-D04 | 1500 | 2370 | +5380 | +7750 | - |
| K2-D05 | 1500 | 2370 | +5380 | +7750 | - |
| K2-D06 | 1500 | 2370 | +5380 | +7750 | - |
| K2-W07 | 750 | 1500 | +6250 | +7750 | - |
| K2-W08 | 1250 | 1500 | +6250 | +7750 | - |
| K2-D09 | 2000 | 2370 | +5380 | +7750 | - |
| K2-W10 | 750 | 1500 | +6250 | +7750 | - |
| K2-W11 | 1250 | 1500 | +6250 | +7750 | - |
| K2-D12 | 2000 | 2370 | +5380 | +7750 | - |

Structural openings in the ICF; sill and head above GF FFL.

### NOTES

1. ICF: Nudura 8" Std, 66.7 EPS + 203.2 core + 66.7 EPS = 336.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8. Dimensions to the ICF faces.
2. Levels above GF FFL. Sill / head = structural opening in the ICF.
3. No structural design issued (no building permit yet). ICF per the Arfa Yapi architectural set (sheets 02-14/14): every drawn 250 load-bearing wall in ICF - 8in Std (203 core = the 20 cm core asked for) external, 6in Std party / stair / lift walls; 20 cm in-situ RC slabs bearing into the cores. Reinforcement and the earthquake design by the client's engineer.
4. Lintel (L-n) and steel (B-n, C-1) marks from rev -, which takes precedence.
5. Masonry walls shown for context.
6. Datum: +-0.00 = site datum (drawings); garden floor FFL -1.75, ground floor FFL +1.00, storeys 2.75 m.
7. ICF on the drawn outer face of the external walls (8in Std 337 v 250 drawn) - rooms lose 87 mm at the envelope.

### REVISIONS

| REV | DATE | DESCRIPTION |
|---|---|---|
| Q01 | 22.10.26 | First issue - one block Rev C / 12 blocks Rev B |

Nudura™ BuildEase

| CLIENT | PROJECT |
|---|---|
| Arfa Yapi Sistemleri via Tremco CPG Turkey | Arfa Yapi apartment blocks, Bayrakli, Izmir - Block A1 |

DRAWING TITLE
**2ND FLOOR ICF GENERAL ARRANGEMENT**

ICF walls, openings, lintels, steel over and engineer's notes

| SCALE | SIZE | DATE |
|---|---|---|
| 1:75 | A2 | 22.10.26 |
| DRAWN | CHECKED | APPROVED |
| TS | | |

| STATUS | DRAWING No. | REV |
|---|---|---|
| QUOTATION | ES26-085-GA-05 | Q01 |

Do not scale. All dimensions in millimetres, levels in metres from GF FFL. Check all dimensions on site.