
SUPPLY SCOPE: Nudura 8in Standard external walls and 6in Standard party / stair / lift walls on 2 courses of footing forms, delivered as FULL forms and cut on site to these drawings; accessories; BuildEase modelling and pre-cut support. Concrete, reinforcement, RC slabs, balconies, stairs, block partitions, windows and doors are by others (shown for coordination). Structural design (Turkish Building Earthquake Code), TS 825 and the fire regulation by the client's engineers.

TEKLİF - UYGULAMA İÇİN DEĞİLDİR

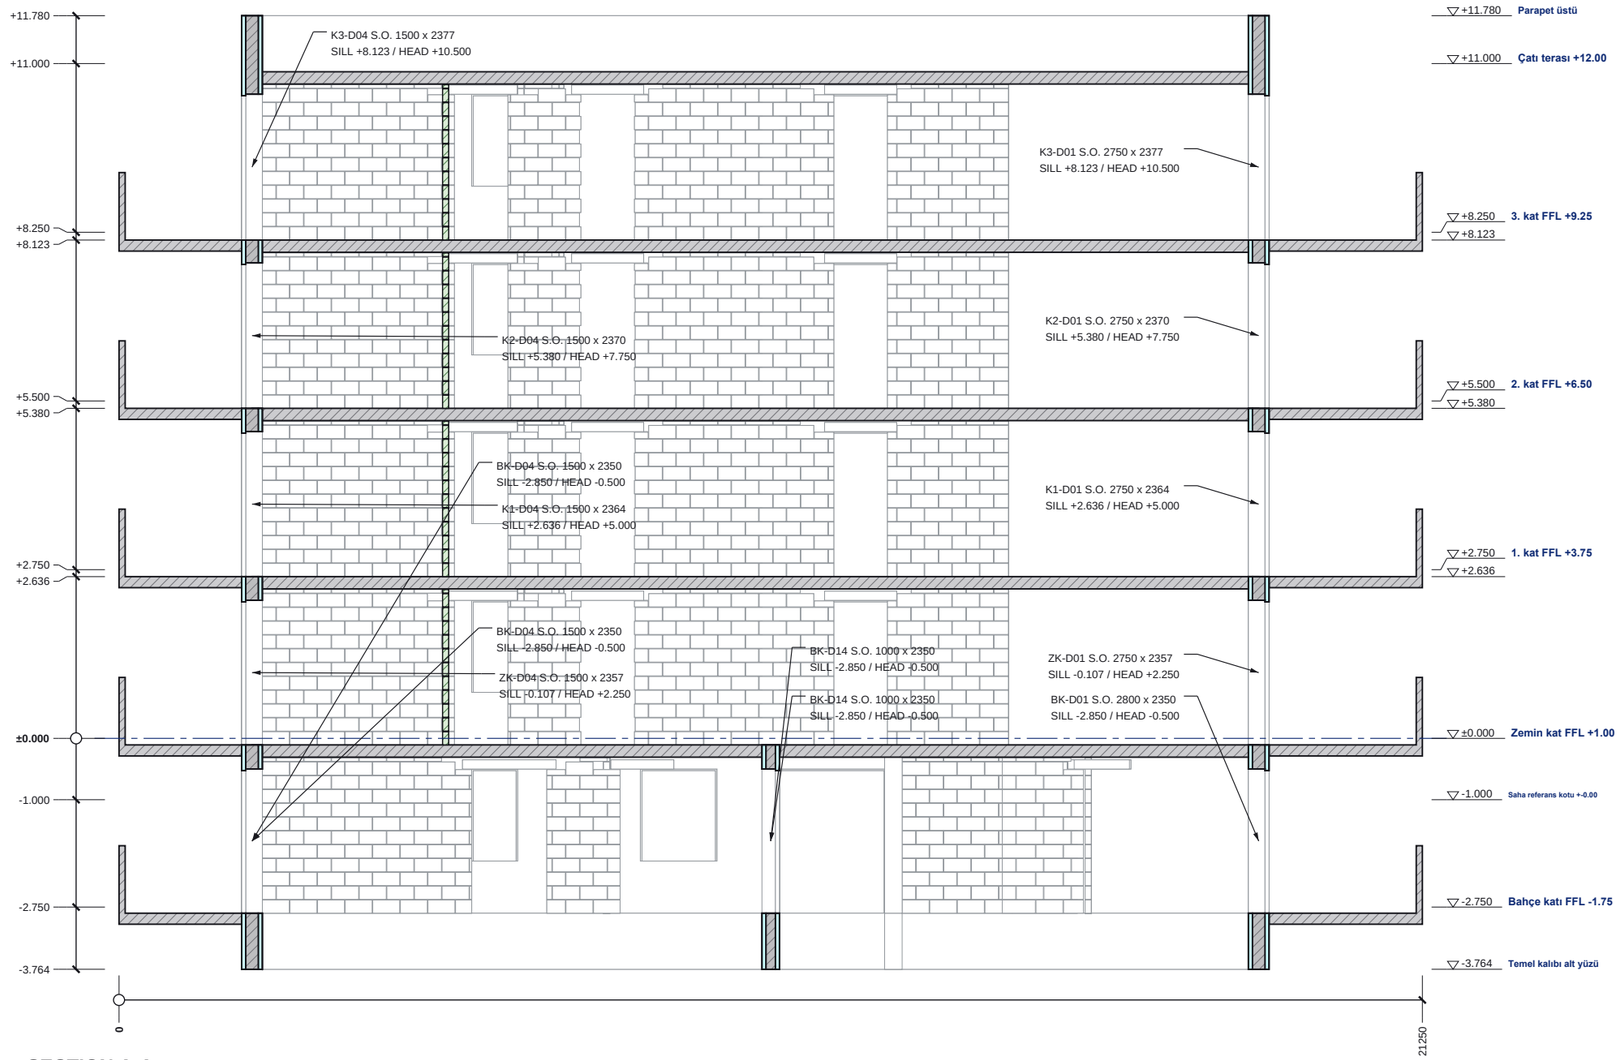

SECTION A-A

Scale 1:100 @ A3 | Looking west; levels above GF FFL

ICF EPS (cut)
ICF concrete core / RC (cut)
Steel (cut)
Masonry wall (cut)
Beyond the cut (line work)

0 1 2 3 4 5m


Ölçekle ölçmeyin. Tüm ölçüler milimetre, kotlar zemin kat FFL'den metre cinsindendir. Tüm ölçüleri sahada kontrol edin.

SECTION A-A SCHEDULES

LEVELS ON THIS SECTION

Kot	FFL
Temel kalıbı alt yüzü	-3.764
Bahçe katı FFL -1.75	-2.750
Saha referans kotu +-0.00	-1.000
Zemin kat FFL +1.00	±0.000
top of ICF W04	+2.636
1. kat FFL +3.75	+2.750
top of ICF W04	+5.380
2. kat FFL +6.50	+5.500
top of ICF W04	+8.123
3. kat FFL +9.25	+8.250
Çatı terası +12.00	+11.000
Parapet üstü	+11.780

SECTION KEY

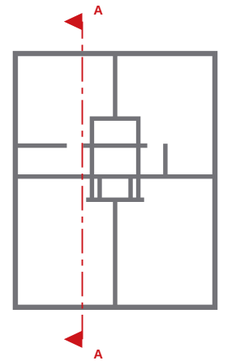

NOTLAR

1. Section A-A is a BuildEase ICF section (not an architect's section line). Cut elements hatched / filled; the model beyond the cut in line work.
2. Levels above GF FFL.
3. ICF: Nudura 8" Std, 66.7 EPS + 203.2 çekirdek + 66.7 EPS = 336.6; 6" Std, 66.7 EPS + 152.4 core + 66.7 EPS = 285.8, 203.2 core + 66.7 EPS = 336.6. No structural design issued (no building permit yet). ICF per the Arfa Yapi architectural set (sheets 02-14/14): every drawn 250 load-bearing wall in ICF - 8in Std (203 core = the 20 cm core asked for) external, 6in Std party / stair / lift walls; 20 cm in-situ RC slabs bearing into the cores. Reinforcement and the earthquake design by the client's engineer.
4. Steel marks, BOS / TOS: rev -. See ES26-085-GA-01 / EL-01 / EL-02 in the approval drawings pack.
5. Referans: +-0.00 = saha kotu (çizimler); bahçe katı FFL -1.75, zemin kat FFL +1.00, kat yüksekliği 2.75 m.
6. ICF, dış duvarların çizilen dış yüzünde (8in Std 337 / çizimde 250) - odalar cephede 87 mm kaybeder.

REVİZYONLAR

REV	TARİH	AÇIKLAMA
Q01	22.10.26	İlk yayın - bir blok Rev C / 12 blok Rev B

Nudura™ BuildEase

MÜŞTERİ	PROJE
Arfa Yapi Sistemleri - Tremco CPG Türkiye aracılığıyla	Arfa Yapi konut blokları, Bayraklı, İzmir - Blok

PAFTA BAŞLIĞI

SECTION A-A

ICF section with levels and build-ups

ÖLÇEK	BOYUT	TARİH
1:100	A3	22.10.26
ÇİZEN	KONTROL	ONAY
TS		

DURUM	PAFTA NO.	REV
TEKLİF	ES26-085-SE-01	Q01